

World standard of multi cutting plotter

CG-FX series CG-75FX / CG-130FX / CG-160FX

CUTTING PLOTTER / CUTTING PLOTTER / CUTTING PLOTTER

- High speed continuous crop mark detection
- Automatic media cut (Y direction)

FX Series



NEW! CG-160FX CUTTING PLOTTER

Expressiveness and Functionality

Create Stickers Without Pattern!



Nesting with the Inkjet plotter JV3 series



Cutting with the CG-FX series as a Print-cut solution



Equipped with Plug-in cutting software
Fine Cut 3 for CorelDRAW and
Fine Cut 5 for Illustrator

Selectable clamp pressure with high and low setting to permit a more accurate cut.

Selectable jog speed of low/medium/high settings to ensure proper and easy positioning of the media.

You can load media from back or front.

RS232C, USB interface is available.

The media roll holder will hold a total of 6 rolls simultaneously.

Optional and exclusive pen adapter can be used.


Pouncing tool is available as an option.



The Optical sensor comes with a LED pointer (Light pointer) for ease of use.

High speed continuous crop mark detection


An optical sensor enables automatic consecutive detection of registration marks throughout the nested image which the Inkjet printers print, in combination with the automatic correcting feature that allows you to obtain a precise contour cut.



A much more accurate cut by constantly detecting a maximum of 4 points continuously and even allowing the user to input number of copies in each X/Y direction.

Engineered Head Unit

Automatic sheet cutter mechanism provides great flexibility and enhance performance.

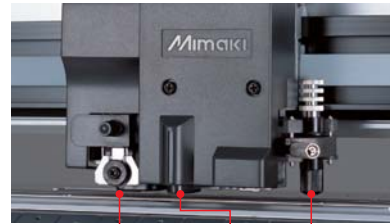

Automatic sheet cutter Light pointer Swivel cutter



Functional and advanced design



Easy operation with back-lit front panel.
Convenient compartment located on the upper portion of the frame.

Specifications

Item	CG-75FX	CG-130FX	CG-160FX
Acceptable sheet width	90mm~1,040mm (3.54"~40.9")	90mm~1,580mm (3.54"~62.0")	90~1,880mm (3.54" ~74")
Acceptable roll sheet	Outer less than φ200mm , Roll weight less than 18kg		Outer less than φ200mm Roll weight less than 22kg
Effective cutting area ^{※1}	760mm × 51m (29.9" × 167')	1,300mm × 51m(51.2" × 167')	1,600mm × 51m(62.9" × 167')
Maximum auto cutting width ^{※2}	870mm (34.2")	1,425mm (56.1")	1,720mm (67.7")
Maximum cutting speed	100cm/s (39.3"/s)		
Maximum moving speed	140cm/s (55"/s)		
Adjustable speed range ^{※3}	1-10cm/s : 1cm step adjustment(0.39"-3.94"/s : 0.39" step adjustment)		
	10-50cm/s : 5cm step adjustment(3.94"-19.68"/s : 2" step adjustment)		
	50-100cm/s : 10cm step adjustment(19.68"-39.37" : 3.94" step adjustment)		
Mechanical resolution	5 μm(0.0002")		
Command resolution	25 μm or 10 μm(0.001" or 0.0004")-MGL-IIc		
Repeatability	±0.2mm (Excluding shrinkage /expansion caused by the film temperature)		
Pen pressure	400g		
Range of down pressure	Cutter	10~20g(2g step), 20~100g(5g step), 100~400g(10g step)	
	Pouncing	10~20g(2g step), 20~100g(5g step), 100~400g(10g step)	
	Pen	10~20g(2g step), 20~100g(5g step), 100~150g(10g step)	
Acceptable sheet ^{※4} Acceptable sheet for pouncing ^{※5}	Vinyl up to 0.15mm(0.006")thickness, Fluorescent type vinyl Reflective sheet Paper thickness: 0.06~0.13mm (0.0024"~0.005")		
Applicable tools ^{※6}	Cutter, Water based ball-point pen Oil based ball-point pen, Pouncing tool		
Type of command	MGL-IIc		
Interface	RS-232C,USB		
Receiver buffer size	30MB Standard (20MB when in sorting)		
Operational Environment	Temperature	5~35°C (41~95 ° F)	
	Humidity	35~75%(Rh) Non-condensation	
Power requirement	AC100V~240V		
Power consumption	130VA or less		
Dimensions (W×D×H)	1,285mm (50.5")×700mm (27.5")×1,217mm (47.9")	1,825mm (71.8")×700mm (27.5")×1,217mm (47.9")	2,125mm (83.6")×700mm (27.5")×1,217mm (47.9")
Weight (with stands)	50kg(110 lbs.)	60kg(132 lbs.)	69kg (152lbs.)

- ※1 : Maximum sheet feeding length differs depending on the software.
- ※2 : Sheet width to cut off from the roll.
- ※3 : Restricted sheet width.
- ※4 : Provided that the blade specific to fluorescent type vinyl (SPB-0007) and the blade specific reflective sheet (SPB-0006) are used.
- ※5 : Pouncing tool intended specifically for pouncing shall be used.
- ※6 : The goods on the market are φ8~φ9 Pen. No guarantee with accuracy, and image quality.

Optional Tools and Accessories

	CG-75FX	CG-130FX	CG-160FX
Cutter holder	SPA-0090		
Blade for sheet cutter	SPA-0119		
Pouncing set	OPT-C0095 (Holder×1, Needle×2)		
Pen-line rubber	SPC-0358	SPC-0353	SPC-0381
Pen-line sponge	SPC-0359	SPC-0354	SPC-0382
Roll set	OPT-C0185	OPT-C0183	OPT-C0187
Sheet basket	OPT-C0184	OPT-C0182	OPT-C0186

Variety of Blades

	CG-75FX	CG-130FX	CG-160FX
Standard Blade for Vinyl	SPB-0030		
For Reflective sheet	SPB-0006		
For Fluorescent sheet	SPB-0007		
For Vinyl sheet and paper	SPB-0001		
For Small character	SPB-0003		

●All trademarks or registered trademarks are the property of the respective owners. ●Specifications are subject to change without notice.

DISTRIBUTOR :
Hybrid Services Ltd
Meridian House, Road One, Winsford. CW7 3QG
Tel: 01606 860044
www.hybridservices.co.uk

DEALER :

All our products are manufactured under our quality assurance system certified by ISO9001

